


DIN 933 (ISO 4017) SCREWS

FULLY THREADED HEXAGON HEAD SCREWS

PART 1: FROM M16 TO M39

DIMENSIONS

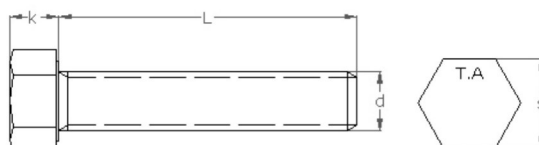

d	M16	M18	M20	M22	M24	M27	M30	M33	M36	M39
p* [mm]	2	2,5	2,5	2,5	3	3	3,5	3,5	4	4
k [mm]	10	11,5	12,5	14	15	17	18,7	21	22,5	25
s [mm]	24	27	30	32	36	41	46	50	55	60

*Thread pitch

APPROXIMATE WEIGHTS

d	M16	M18	M20	M22	M24	M27	M30	M33	M36	M39
L [mm]	Peso* [g]									
15	57									
20	64	88	116	143	184	261				
25	70	96	126	155	199	280				
30	77	105	136	168	214	310	400			
35	84	113	147	181	229	319	424	543	680	869
40	90	121	157	193	244	338	448	572	724	910
45	97	129	167	206	259	358	472	601	758	951
50	103	137	178	219	274	377	496	630	793	992
55	110	146	188	232	289	397	519	659	827	1030
60	117	154	199	244	304	416	543	688	861	1070
65	123	162	209	257	319	435	566	717	896	1110
70	130	170	219	269	334	454	590	746	930	1160
75	137	178	229	282	348	473	614	775	964	1200
80	144	187	240	295	363	492	637	806	1000	1240
85	150	195	250	308	378	512	661	837	1030	1280
90	157	203	260	321	393	531	685	866	1070	1320
95	164	211	271	333	408	550	708	891	1100	1360
100	170	219	281	346	423	569	732	920	1150	1400
110	184	236	302	371	453	608	779	978	1210	1480
120	197	252	322	397	483	647	827	1040	1270	1560
130	210	269	343	421	513	685	874	1090	1340	1640
140	224	285	364	448	543	724	921	1150	1410	1720
150	237	301	384	473	572	762	969	1210	1480	1800
160	250	317	404	498	602	801	1010	1270	1550	1880
170	263	333	424	523	632	839	1060	1330	1620	1960
180	276	349	444	548	662	875	1110	1390	1690	2040
190	290	365	464	573	692	911	1160	1450	1760	2120
200	303	381	484	598	722	947	1210	1500	1830	2200
220	332	413	524	648	782	1019	1310	1620	1970	2360
240	360	445	564	698	842	1091	1410	1740	2110	2520
260	388	487	604	748	902	1163	1510	1860	2250	2680
280	416	519	644	798	962	1235	1610	1980	2390	2840
300	444	551	684	848	1022	1307	1710	2100	2530	3000

*For steel density of 7,85g/cm³